

ewo

Chameleon

C210 Integral

Projector
Wall luminaire
Pole mounted system



DB 703
Anthracite

ewo
colors

[Check out our online Configurator](#)



IP66 RoHS IK08 UL/CSA

Housing

Housing material	Aluminum die-cast
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard colors	RAL 9007, 7015, 9005, 7016, 9007, 9006, 8019, DB703, D2525 Gris 2900
Glass	Safety glass (ESG)
Mounting options	Pole, wall, surface
* other colors on request	
** ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance	

Electrical

	Monochrome		Tunable White				RGBW			
			Discrete		Internal		Discrete		Internal	
	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series
Voltage [V], [Hz]	120-277v, 50/60		120-277v, 50/60		120-277v, 50/60		120-277v, 50/60		120-277v, 50/60	
LED nr.	24	16	24	-	-	64	24	-	-	64
Current max. [mA]	750	1,000*	1,000	-	-	400	850	-	-	250
Power max. [W]	56.9	51.7	43.5	-	-	45.3	51.4	-	-	53.4
* 700 for EG06 – 4°										

Driver (external)

	Monochrome	RGBW	Tunable White
Control Options	ON OFF 1-10V DALI	DALI DMX	T8 DALI DMX
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone		
Control accessories	Further accessories on request		
Software	connexx light management software for remote management of intelligent luminaire clusters		

Measurements

Model	①	②	Weight [lb]
C210	0.37*	0.5*	13*
① projected windage area [ft²]			* without accessories
② lateral windage area [ft²]			


Operating conditions

Lifetime	Visit the configurator for specific lifetime options
----------	--

Light distributions

Monochrome


Symmetric

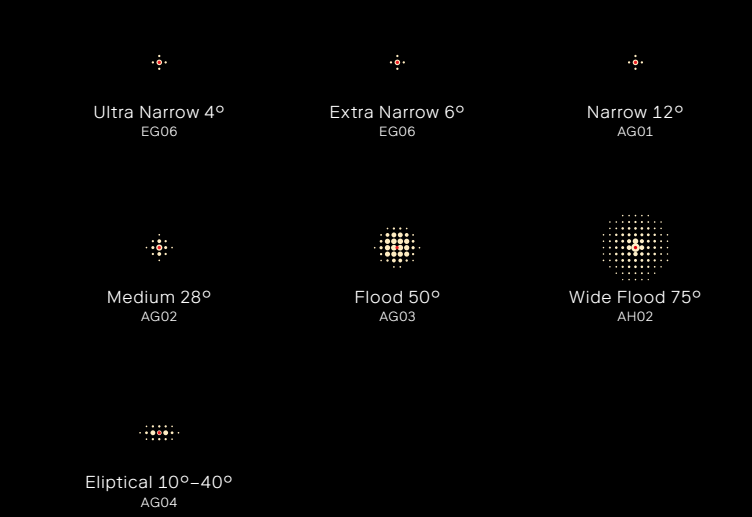


RGBW & TW

Internal colors mixing


EGM: optimal internal mixing

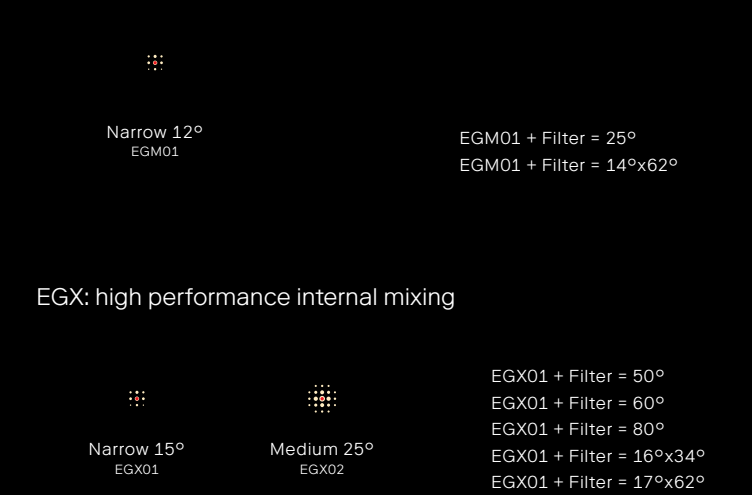

EGX: high performance internal mixing




Asymmetric

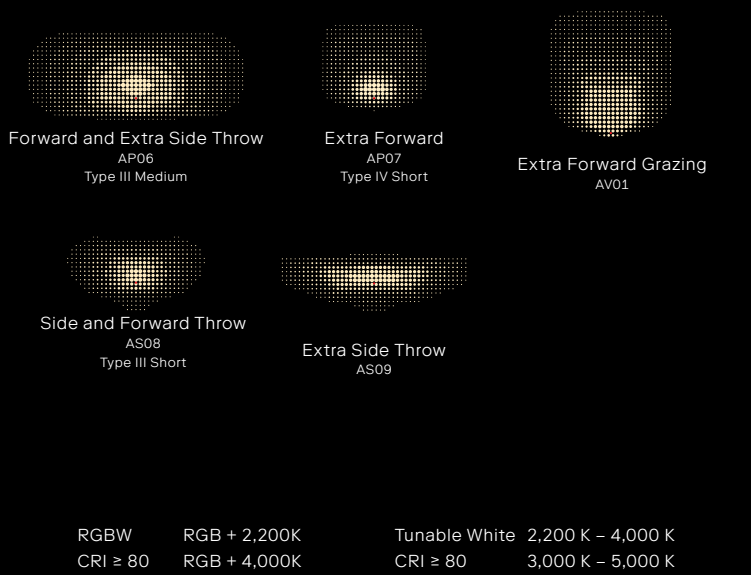

Discrete colors mixing

Asymmetric

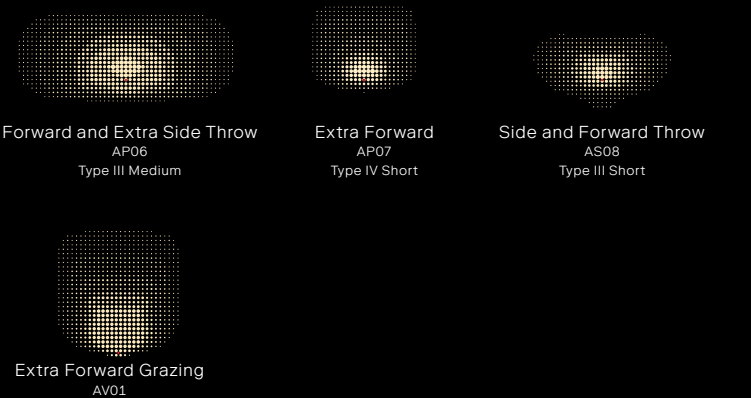

Chameleon





Optic*		Output*		CCT	External Accessory	Decorative Accessory	Internal Accessory	Cable	Finish	Mounting	Control	ECP*
AG01	Symmetric Narrow 12°	350 mA	3747lm	2200K	Full Snoot	Full Shade	Honeycomb Louver	3 ft cable	RAL 7015	Wall Bracket	On/Off	Yes
AG02	Symmetric Medium 27°	400mA	4190lm	2700K	Half Snoot	Slotted Shade	Circular Louver	10 ft cable	RAL 7016	Spike	DMX	No
AG03	Symmetric Flood 48°	450mA	4626lm	3000K	None		None	15 ft cable	RAL 9005	Connection box	DALI	* Enhanced Corrosion Protection
AG04	Symmetric EllipHcal 10-40°	500mA	5057lm	4000K				Other	RAL 9006	Pole adaptor	0-10V	
AH02	Symmetric Wide Flood 60°	550 mA	5482lm	Tunable White					RAL 9007			
AP06	Asymmetric Forward and Extra Side Throw 27°	600mA	5904lm	RGBW					RAL ____			
AP07	Asymmetric Extra Forward	650mA	6322lm									
AS07	Asymmetric Side Throw	700mA	6734lm									
AS08	Asymmetric Side and Forward Throw	750mA	7097lm									
AV01	Asymmetric Extra Forward Grazing	800mA	7457lm									
EG06	Symmetric Narrow 4°	850mA	7810lm									
EGM01	Symmetric Narrow 12°	900mA	8160lm									
EG06	Symmetric Narrow 6°											
EGM01	Symmetric Medium 25°											
EGM01	Symmetric Elliptical 14-62°											
EGX01	Narrow 15°	* Lumens based on AG01 optic and 4000K CCT * Other outputs on request										
EGX02	Medium 25°											




* A-series not for RGBW/TW

External accessories



Shadow Sail

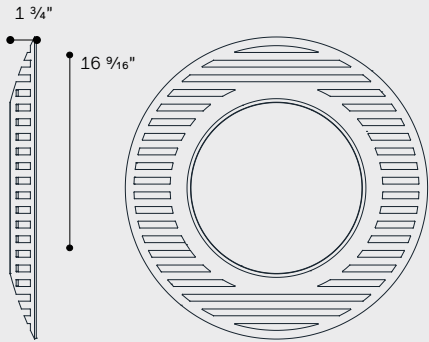

Transparent Snoot

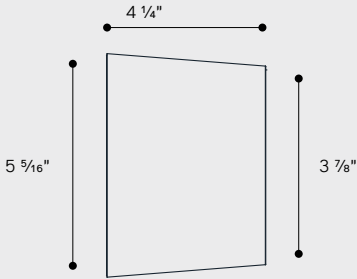



Heritage Sail


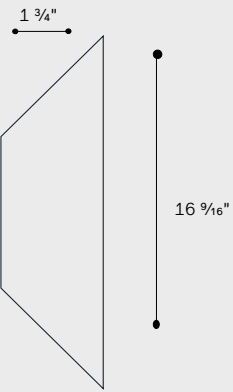



Support for scenic Filters



For custom C210 accessories,
please contact ewo USA



Snoot

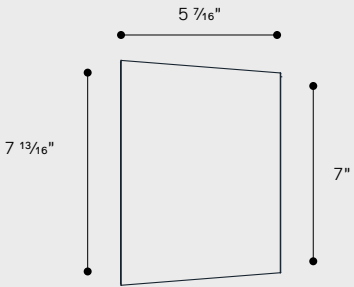

Half Snoot

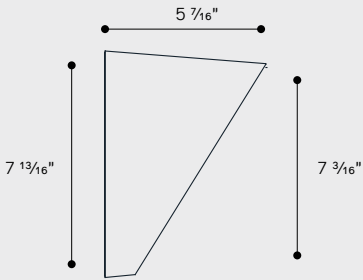

Internal accessories


Honeycomb Louver



ewo
Colors

Mounting accessories

Wall Hinge




ewo
Colors

Circular Louver




ewo
Colors

V-Notch

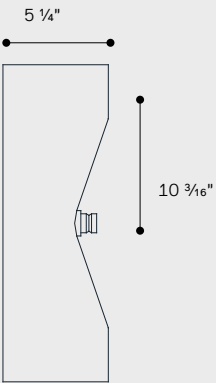


ewo
Colors

Pole adaptor

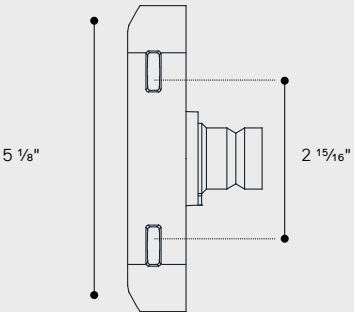

ewo
Colors



Catenary





ewo
Colors

Mounting accessories



Connection box

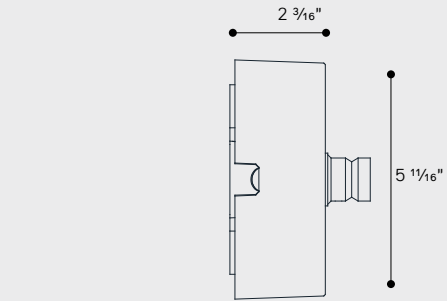

Single pole adapter

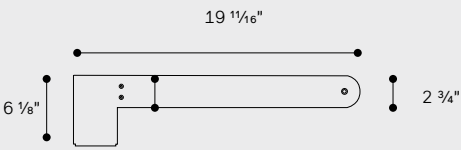

Double pole adapter

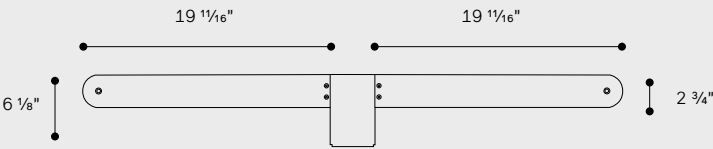

Ground spike

