


ewo

Chameleon

C260 Integral

Projector
Wall luminaire
Pole mounted system



[Check out our online Configurator](#)




IP66 RoHS IK08 UL/CSA



A-Series



E-Series

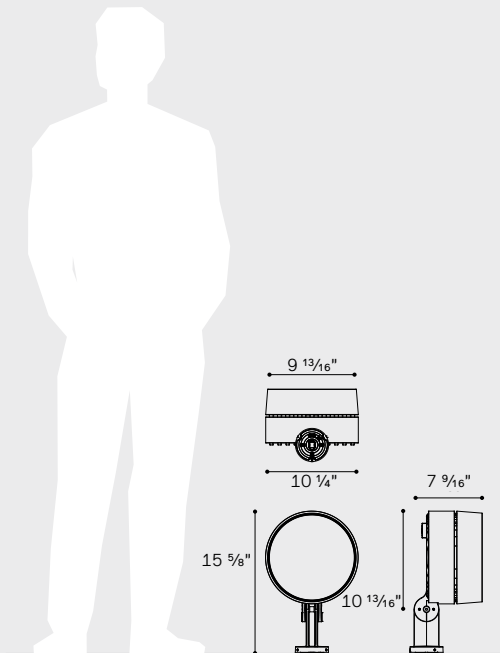

Housing

Housing material	Aluminum die-cast
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard colors	RAL 9007, 7015, 9005, 7016, 9007, 9006, 8019, DB703, D2525 Gris 2900
Glass	Safety glass (ESG)
Mounting options	Pole, wall, surface
* other colors on request	
** ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance	

Measurements

Model	①	②	Weight [lb]
C260	0.42*	0.64*	16.8*
① projected windage area [ft²]			* without accessories
② lateral windage area [ft²]			

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
----------	--

Electrical

	Monochrome		Tunable White				RGBW			
			Discrete		Internal		Discrete		Internal	
	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series
Voltage [V], [Hz]	120-277v, 50/60 Hz									
LED nr.	36	24	36	-	-	64	24	-	-	64
Current max. [mA]	900	1,000*	1,000	-	-	450	1000	-	-	350
LED power [W]	64.8	48.0	43.5	-	-	51.0	71.2	-	-	65.2
* 700 for EG06 – 4°										


Driver (external)

	Monochrome	RGBW	Tunable White
Control Options			
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone		
Control accessories	Further accessories on request		
Software	connexx light management software for remote management of intelligent luminaire clusters		

Light distributions

Monochrome

Symmetric

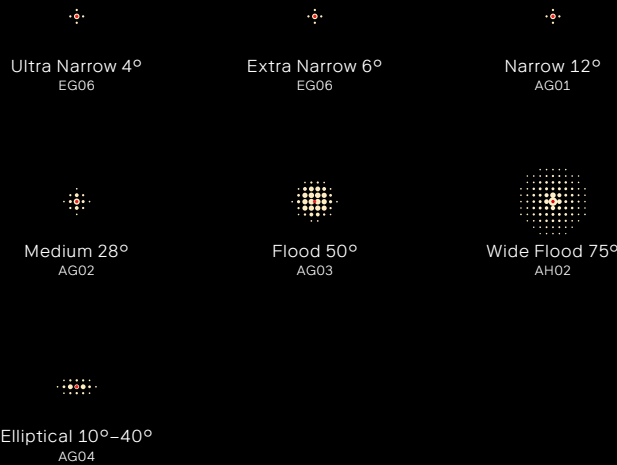


RGBW & TW



Internal colors mixing




EGM: optimal internal mixing



EGX: high performance internal mixing




Asymmetric

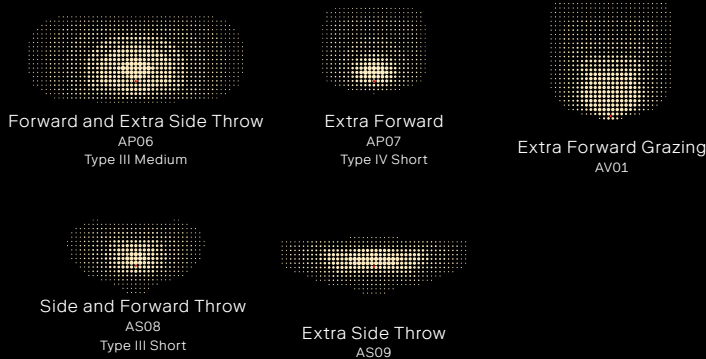

Discrete colors mixing



Asymmetric

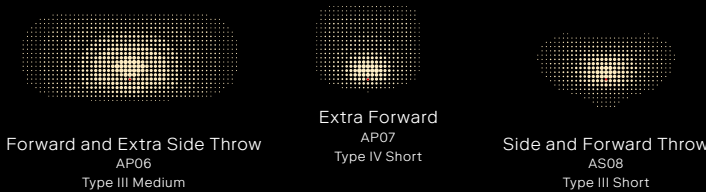

	Monochrome		Tunable White		RGBW	
	4,000		5,000		4,000	
Light colors (K)	4,000		5,000		4,000	
CRI*	≥ 80		≥ 80		≥ 80	
Distribution	AG01	EG06 6°	AV01	EGX01 15°	AV01	EGX01 15°
BUG Ratings	B4 U0 G0	B4 U0 G0	B3 U0 G1	B4 U0 G0	B3 U0 G1	B4 U0 G0
MacAdam ellipses	≤ 3 SDCM		≤ 3 SDCM		≤ 3 SDCM	
Luminous flux [lm]	10,100	8,060	3,900	5,300	2,930	6,270

* other values on request

Chameleon C260 Integral



C260I

-

-

-

-

-

-

-

-

-

-

-

-

Optic*		Output*		CCT	External Accessory	Decorative Accessory	Internal Accessory	Cable	Finish	Mounting	Control	ECP*
AG01	Symmetric Narrow 12°	350 mA	5620lm	22K - 2200K	FS - Full Snoot	FSH - Full Shade	HL - Honeycomb Louver	3FT	RAL7015	WB - Wall Bracket	OO - On/Off	ECP
AG02	Symmetric Medium 27°	400mA	6285lm	27K - 2700K	HS - Half Snoot	SLSH - Slotted Shade	CL - Circular Louver	10FT	RAL7016	SP - Spike	DMX	NoECP
AG03	Symmetric Flood 48°	450mA	6939lm	3K - 3000K	NE - None	ND - None	NI - None	15FT	RAL9005	CB - Connection box	DALI	* Enhanced Corrosion Protection
AG04	Symmetric Elliptical 10-40°	500mA	7586lm	4K - 4000K				CUS - Custom	RAL9006	PA - Pole adaptor	0-10V	
AH02	Symmetric Wide Flood 75°	550 mA	8223lm	TW - Tunable White					RAL9007			
AP06	Asymmetric Forward and Extra Side Throw	600mA	8856lm	RGBW					RAL____			
AP07	Asymmetric Extra Forward	650mA	9482lm									
AS08	Asymmetric Side and Forward Throw	700mA	10102lm									
AV01	Asymmetric Extra Forward Grazing	750mA	10645lm									
AS09	Extra Side Throw	800mA	11185lm									
EG06-4	Symmetric Narrow 4°	850mA	11714lm									
EG06-6	Symmetric Narrow 6°	900mA	12240lm									
EGM01	Narrow 12°	950mA	12763lm									
EGX01	Narrow 15°	1000mA	13275lm									
EGX02	Narrow 15°											



* Lumens based on AG01 optic and 4000K CCT

* Other outputs on request




* A-series not for RGBW/TW

External accessories



Shadow Sail

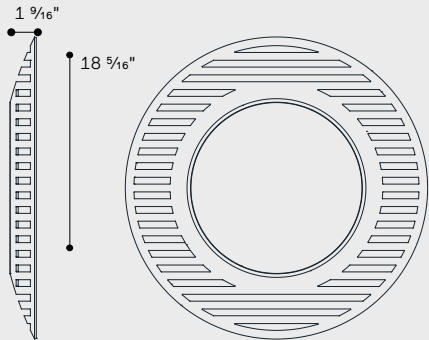

Transparent Snoot

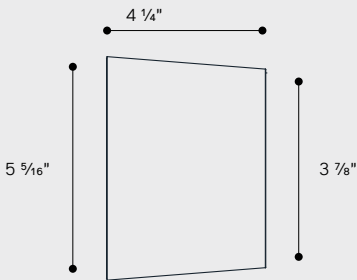




Heritage Sail


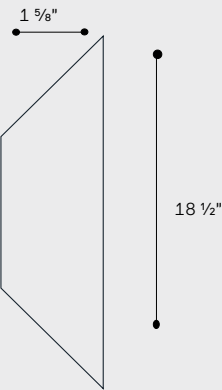



Support for scenic Filters




For custom C260 accessories,
please contact ewo USA

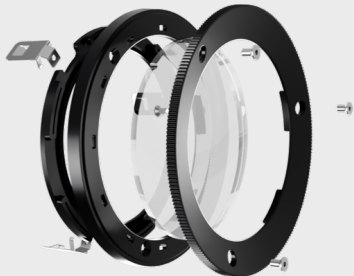

Snoot

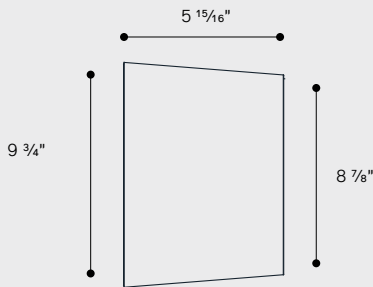


Half Snoot



Internal accessories



Honeycomb louver



ewo
Colors


Mounting accessories

Wall Hinge




ewo
Colors

Circular louver





ewo
Colors

V-Notch

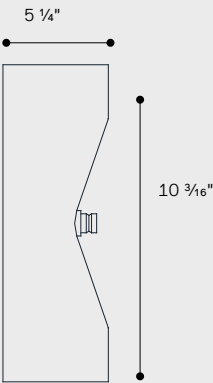



ewo
Colors

Pole adaptor

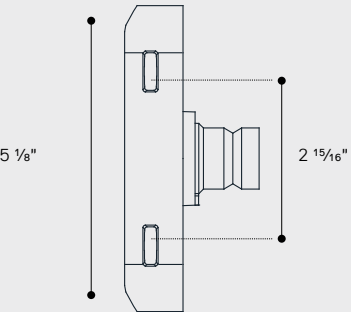

ewo
Colors




Catenary






ewo
Colors

Mounting accessories




Connection box

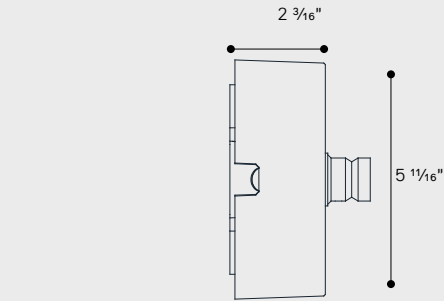

Single pole adapter

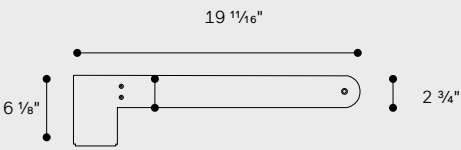

Double pole adapter

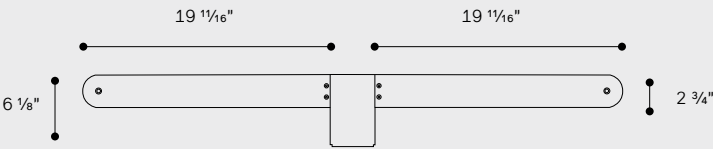

Ground spike

